

SERIES 2500 1-1/2" X 1-1/2" HOSE RACK ASSEMBLIES

For Class II Service. Used to provide an immediate and more efficient means of fire control. The assembly is capable of one person operation and accepting the nationally recognized standard of 100 GPM at 65 PSI at the outlet of the valve.

STANDARD COMPONENTS:

Model 4070 U/L & ◀FM ▶ 1 1/2" 3.8cm Angle Valve Rough Brass 300 PSI/20.7 bars

Model 2950 Valve Escutcheon

Model 2792 U/L ◀FM ▶ Hose Rack Red Enamel Model 2755 1 1/2"/3.8cm Satin Brass Hose Rack **Nipple**

Model 2915 ◀FM▶ 1 1/2"/3.8cm lined 500 PSI/34.5

bars Polyflex Spacing Hose

Model 2930 1 1/2"/3.8cm Satin Brass Pin Lug

Model 2962 1 1/2"/3.8cm U/L & ◀FM ▶ Satin Brass

Fog Nozzle

Model 1985 Instructional Label

MODEL SELECTION

2505 50'

2507 75'

2510 100'

PRODUCT OPTIONS

MOUNTING TYPES:

WALL BRACKET - 1-1/2" Model 4060 Rough □ -E

Brass 300 lb. U/L Angle Valve PIPE CLAMP - (For Pipe)

□ -G 1-1/2" Model 4060 Rough Brass 300 lb. U/L Angle Valve

FINISHES:

Rack - Red Enamel □ -A Valve - Rough Brass

Trim - Polished Brass

□ -B Rack - Red Enamel Valve - Polished Brass

Trim- Polished Brass

Rack - Polished Chrome Plated □ -C Valve - Rough Chrome Plated

Trim- Rough Chrome Plated

□ -D Rack - Polished Chrome Plated Valve - Polished Chrome Plated Trim- Polished Chrome Plated

approvals. Dimensions are subject to manufacturer's tolerance and may change without notice. Potter Roemer Fire Pro assumes no responsibility for use of void or superceded data. © Copyright Potter Roemer- Fire Pro, Member of Morris Group International ™ Please visit potterroemer.com for most current specifications.

Call Potter Roemer - Fire Pro for current listings and

2500 SERIES Date: 03/08/24











PRODUCT OPTIONS (cont.)

EQUIPMENT:

-10 Model 2760 1-1/2" Brass Automatic Drain Valve

MODEL 2510 (Shown)

☐ -11 Model 2765 Adjustable Brass Pressure Restricting Device

Model 4090 1-1/2" Double Female Adjustable **-14**

Pressure Restricting Angle Valve

Model 4010-FA2 1-1/2" Double Female **-16**

Adjustable Pressure Regulating Angle Valve **1**-18 Model 4042-FS2 Double Factory Set Female

Pressure Regulating Valve

-21 Model 2915 Single Jacket Lined 300 lb. Test

Polyflex U/L Labeled

-23 Model 2926 Single Jacket Lined 500 lb. Test PR Superflex

□ -24 Model 2926 Single Jacket Lined 500lb. Test

PR Superflex U/L Labeled

Model 2930 Rocker Lug Coupling **-**31

Model 2941 Extruded Aluminum Coupling **-**32

-42 Model 2960 Red Lexan Plastic Fog Nozzle

□ -43 Model 2972 Brass Fog Nozzle with Rubber

Bumper

Model 2980 Red Lexan Plastic "All Fog" Nozzle **-44**

<u>-45</u> Model 2985 Brass "All Fog" Nozzle with Rubber

Model 2993 Brass Fixed-Flow Adjustable Nozzle □**1** -46

POTTER ROEMER

Headquarters: P.O. Box 3527 City of Industry, CA 91744 U.S.A. Los Angeles Area 800-366-3473 626-855-4890

Also in: New York (800) 526-4592 Chicago (800) 547-3473 Atlanta (800) 762-0542 Miami (833) 744-3473 Dallas (866) 644-3473

www.potterroemer.com




SERIES 2500 1-1/2" X 1-1/2" HOSE RACK ASSEMBLIES

MODEL DIMENSIONS


Model No.	Hose Length	Valve Size	Hose Dia.	Dimensions			
				Α	В	С	D
2505	50'	1-1/2"	1-1/2"	23-1/2"	22"	18"	4"
2507	75'	1-1/2"	1-1/2"	26"	24-1/2"	18"	4"
2510	100'	1-1/2"	1-1/2"	30"	28-1/2"	18"	4"

NOTE: Add 4" to hose rack assembly dimension "C" for Model 2926 PR-Superflex Hose

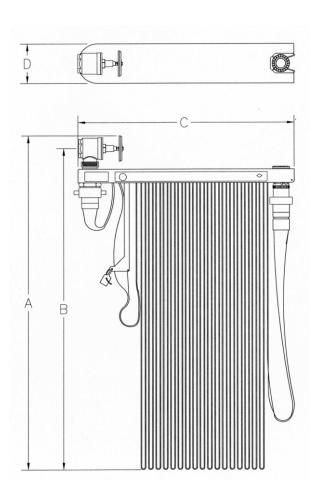



-E WALL BRACKET



-G PIPE CLAMP

Call Potter Roemer - Fire Pro for current listings and approvals. Dimensions are subject to manufacturer's tolerance and may change without notice. Potter Roemer-Fire Pro assumes no responsibility for use of void or superceded data. © Copyright Potter Roemer-Fire Pro, Member of Morris Group International ™ Please visit potterroemer.com for most current specifications.















POTTER ROEMER

Headquarters: P.O. Box 3527 City of Industry, CA 91744 U.S.A. Los Angeles Area 800-366-3473 626-855-4890 Also in: New York (800) 526-4592 Chicago (800) 547-3473 Atlanta (800) 762-0542 Miami (833) 744-3473 Dallas (866) 644-3473

www.potterroemer.com